


BALLAST ANGLE 10°.V - Art. 23010.V

MATERIAL	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
APPLICATION	Any type of flat roof with a maximum slope of 5 °; on the ground, on beaten ground with inert material or pavements		
INCLINATION ANGLE	10°	QUANTITY PER PALLET	10 pieces
BALLAST WEIGHT	60 kg	PALLET DIMENSIONS	70 cm x 98 cm, h = 58 cm
DISTANCE OF MODULES	From 60 cm to 100 cm	PALLET WEIGHT	600 kg
MODULE POSITIONING	Horizontal, Vertical	DIMENSION OF PV PANEL DRAWING	165 cm x 99,2 cm

SYSTEM DETAILS UNIT OF MEASUREMENT - CM VERTICAL PANEL LAYING

Side View

Distance between panels starting from 60 cm to 100 cm

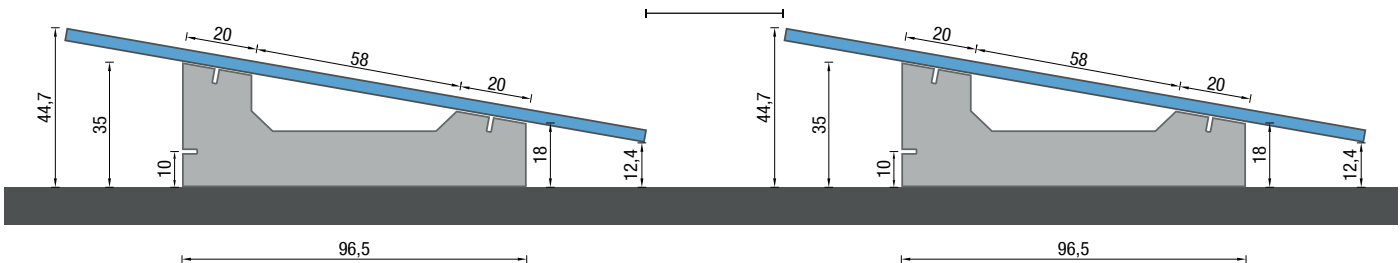


Top View



SYSTEM DETAILS UNIT OF MEASUREMENT - CM HORIZONTAL PANEL LAYING

Side View

Distance between panels starting from 60 cm to 100 cm

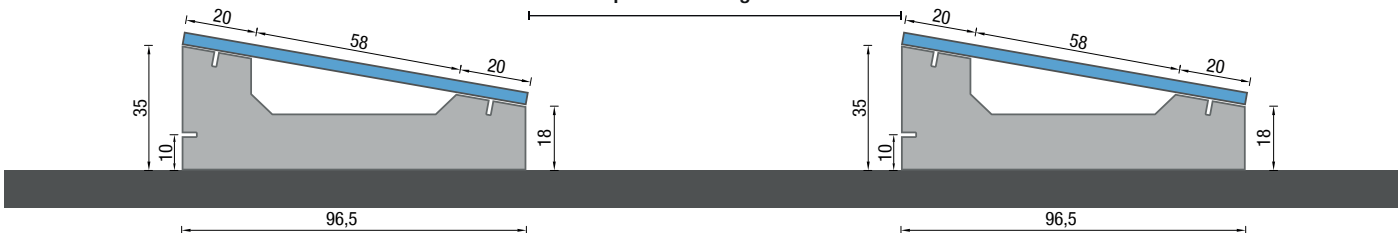

USEFUL INFORMATION

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It is recommended to also consult the information indicated in the assembly instructions of the panel manufacturer