


BALLAST ANGLE 3°.K - Art. 23003.K

MATERIAL	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
APPLICATION	Any type of flat roof with a maximum slope of 5°; on the ground, on beaten ground with inert material or pavements		
INCLINATION ANGLE	3°	QUANTITY PER PALLET	16 pieces
BALLAST WEIGHT	41 kg	PALLET DIMENSIONS	90 cm x 98 cm h = 46 cm
DISTANCE OF MODULES	From 15 cm to 45 cm	PALLET WEIGHT	656 kg
MODULE POSITIONING	Horizontal, Vertical	DIMENSION OF PV PANEL DRAWING	165 cm x 99,2 cm



SYSTEM DETAILS UNIT OF MEASUREMENT - CM VERTICAL PANEL LAYING

Side View

Distance between panels starting from 15 cm a 45 cm

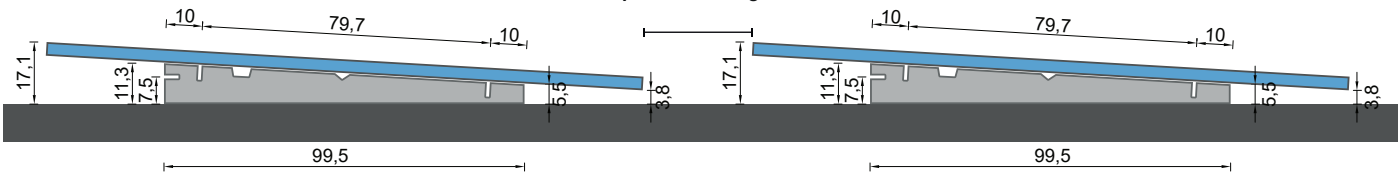


Top View



SYSTEM DETAILS UNIT OF MEASUREMENT - CM HORIZONTAL PANEL LAYING

Side View

Distance between panels startin from 15 cm a 45 cm

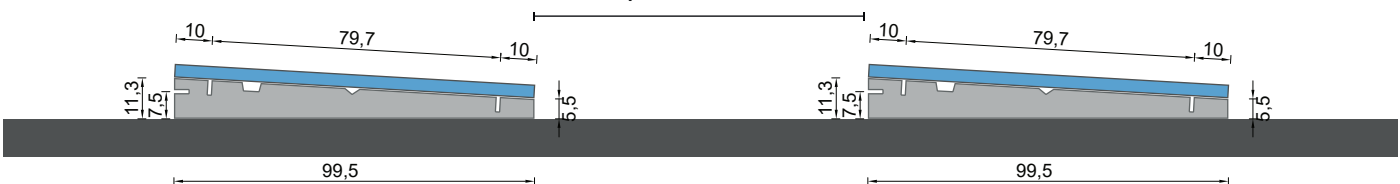

USEFUL INFORMATION

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It is recommended to also consult the information indicated in the assembly instructions of the panel manufacturer